

4

3

2

1

TETRAMAX SPECIFICATIONS

Item	Description	Minimum	Maximum
A1	Column Spacing	10'	30'
A2	Column Overhang	NA	42"
A3	Width of Trolley	15'	42'
A4	Height of Column	10'	25'
A5	Vertical Lift	0	120"
A6	Height Above Bridge Beam	NA	110"
A7	Degrees of Rotation	0°	315°
A8	Weight Capacity	0	10,000#
A9	Trolley Travel		Trolley Width minus 6 1/2'
A10	Bridge Travel		Sum of A1 Columns

Bridge Speed 75fpm
 Trolley Speed 60fpm
 Hoist Speed 25fpm



		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN	
		INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED	
		MATERIAL		ENG APPR.	
NEXT ASSY	USED ON	FINISH		MFG APPR.	
APPLICATION		DO NOT SCALE DRAWING		Q.A.	
				COMMENTS:	
				TITLE: TetraMax Assy	
		SIZE	DWG. NO.	REV	
		B			
		SCALE: 1:200		WEIGHT:	SHEET 1 OF 1

B

B

A

A

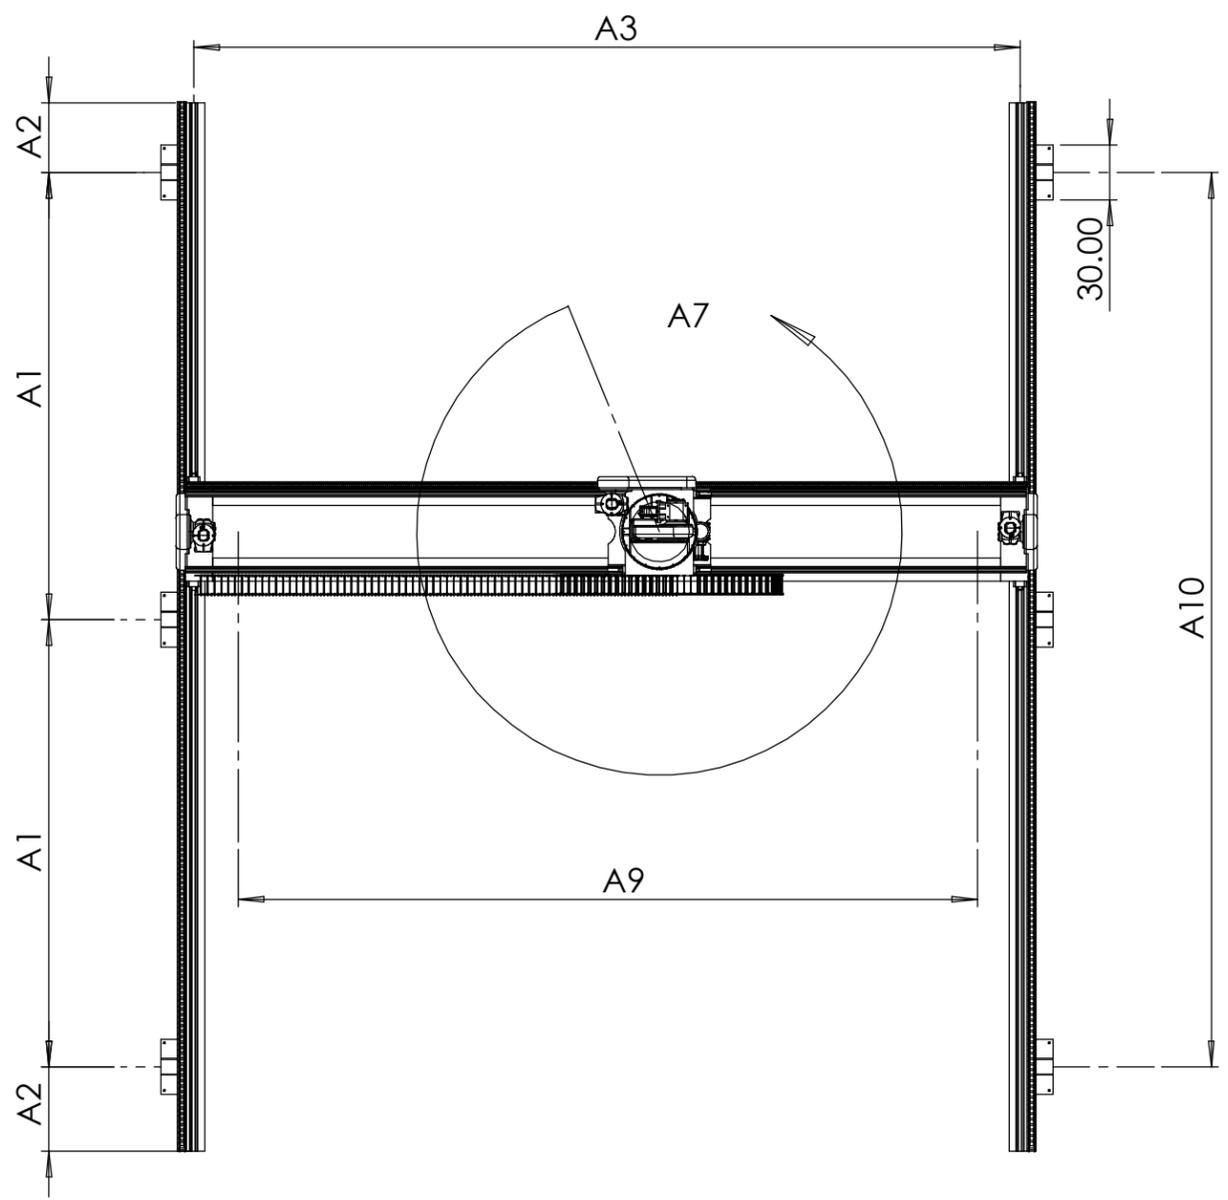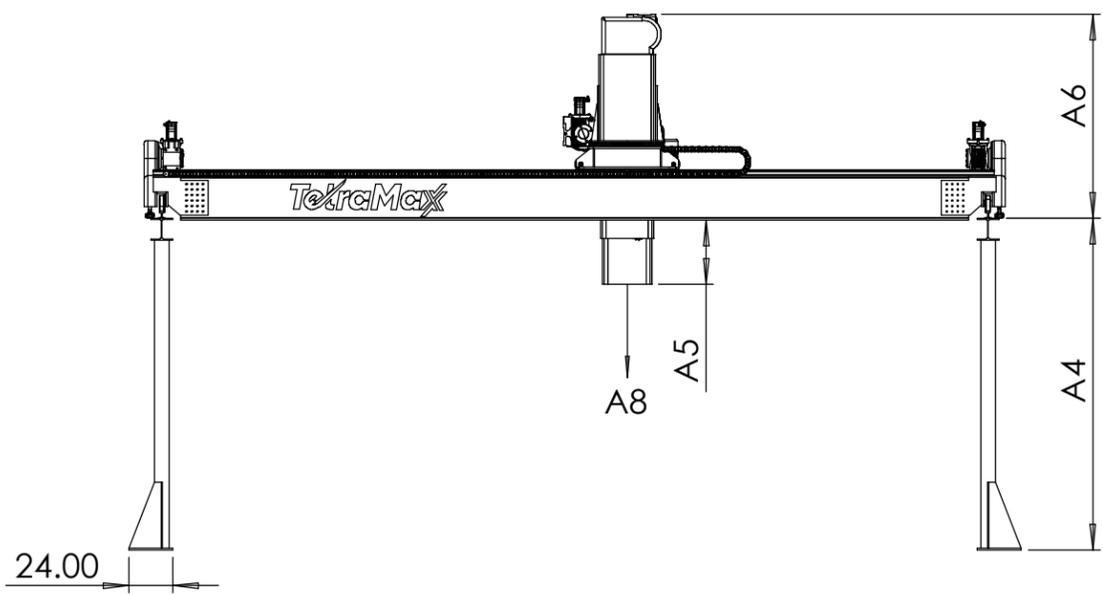

4

3

2

1